

TRIMBLE NAVIGATION
MINIATURE ANTENNA
GPS ANTENNA WITH LOW NOISE AMPLIFIER

Part Number 66801-00

Document Number 66801-00-SP

Copyright © 2001
Trimble Navigation Limited
935 Steward Drive,
Sunnyvale, CA 94085, USA

All rights reserved

SPECIFICATION FOR GPS ANTENNA WITH LOW NOISE AMPLIFIER

1.0 APPLICATION

THIS SPECIFICATION DESCRIBES THE ELECTRICAL AND MECHANICAL CONDITIONS OF THE TRIMBLE MINIATURE ANTENNA, P/N 66801-00.

2.0 SYSTEM

THIS ANTENNA SYSTEM CONSISTS OF TWO FUNCTIONAL BLOCKS LISTED BELOW.

2.1 ANTENNA ELEMENT

2.2 LNA

3.0 GENERAL

3.1 ENVIRONMENTAL CONDITIONS

3.1.1	OPERATING TEMPERATURE	-40°C TO +85°C
3.1.2	STORAGE TEMPERATURE	-40°C TO +100°C
3.1.3	RELATIVE HUMIDITY	20% TO 95%

3.2 ELECTRICAL SPECIFICATIONS


3.2.1	INPUT VOLTAGE	3.0V ± 0.3V
3.2.2	POWER CONSUMPTION	5~13mA (-40°C~+85°C)
3.2.3	OUTPUT CONNECTOR	HFL
3.2.4	CABLE	0.8D 85mm: BLACK

3.3 MECHANICAL SPECIFICATIONS

3.3.1	CONFIGURATION AND DIMENSION	SEE ATTACHED FIGURE
3.3.2	WEIGHT	20g TYP

SPECIFICATION FOR GPS ANTENNA WITH LOW NOISE AMPLIFIER		
4.0	ANTENNA	
4.1	FREQUENCY RANGE	1,575.42±1.023MHz
4.2	GAIN	90° : 3.0dBi MIN. 10° : -5.0dBi MIN. (MOUNTED ON THE 60mm X 60mm SQUARE GROUND PLANE)
4.3	POLARIZATION	RHCP
4.4	AXIAL RATIO	90° : 4.0dB MAX. 10° : 6.0dB MAX. (MOUNTED ON THE 60mm X 60mm SQUARE GROUND PLANE)
5.0	LNA	
5.1	FREQUENCY RANGE	1,575.42±1.023MHz
5.2	GAIN	24 ±3 dB (-40°C~+85°C)
5.3	NOISE FIGURE	1.5dB MAX. (+25°C± 5°C) 2.2dB MAX. (+85°C)
5.4	OUT OF BAND REJECTION	$f_0=1,575.42\text{MHz}$ $f_0\pm 20\text{MHz}$ 7dB MIN. $f_0\pm 30\text{MHz}$ 12dB MIN. $f_0\pm 50\text{MHz}$ 20dB MIN. $f_0\pm 100\text{MHz}$ 30dB MIN.
5.5	OUTPUT IMPEDANCE	50Ω
5.6	OUTPUT VSWR	2.0MAX.
6.0	OVERALL SPECIFICATIONS (THROUGH ANTENNA, LNA, CABLE AND CONNECTOR)	
6.1	FREQUENCY RANGE	1,575.42±/-1.023MHz
6.2	GAIN	27 ± 3dBi (+25°C ± 5°C) 27 ± 4dBi (-40°C~+85°C) (MOUNTED ON THE 60mm x 60mm SQUARE GROUND PLANE)
6.3	OUTPUT IMPEDANCE	50Ω
6.4	VSWR	2.0MAX.
7.0	MTBF	5.0E+6Hr.
8.0	RECOMMENDED STORAGE CONDITION	STORE IN ROOM CONDITION AS LISTED BELOW: TEMPERATURE -20°C~+45°C, HUMIDITY 80% MAX.
9.0	RELIABILITY TEST	TBD
10.0	EXTERNAL APPEARANCE	NO STAIN OR FLAW MUST BE FOUND.
11.0	DATA	GAIN (AT 3.0V ± 0.2V f=1575MHz) AND POWER CONSUMPTION AT ROOM TEMPERATURE.


REV. HISTORY			
REV	REV	DESCRIPTION	DATE
023742	A	RELEASE TO PRODUCTION	4-16-08
036644	B	ERROR ON DRAWING	3-6-09
037853	C	REMOVED NOTCHES	2/3/10

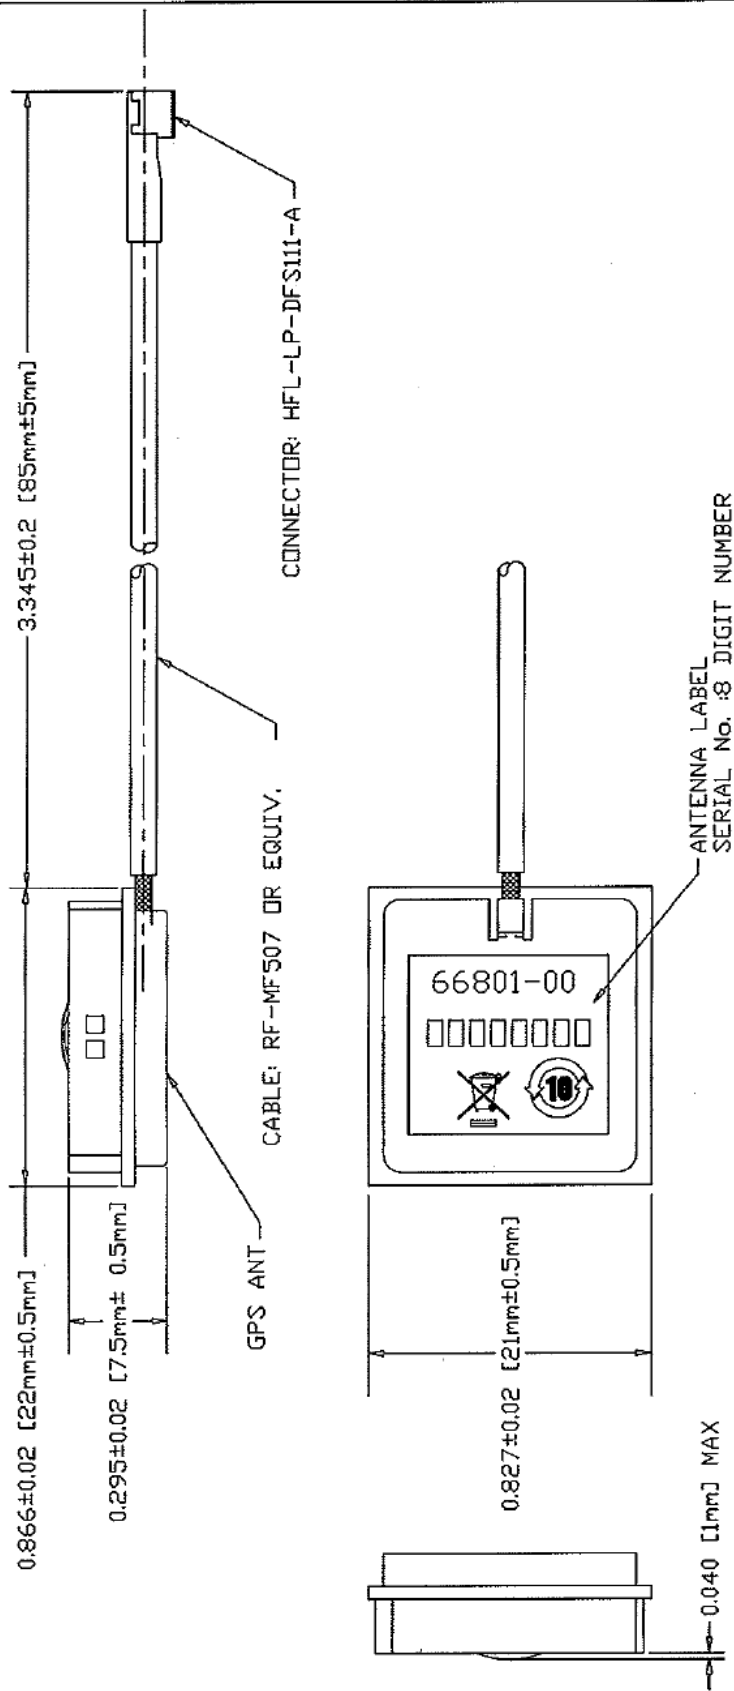

		UNPACKAGED MINI 30 VOLT ANTENNA	
SERIAL NO. 66801-00	DATE 4/16/08	SIZE C	SCALE NONE
APPLICATION		SHEET 1 OF 1	

Bag Labeling

Note: Label below must be placed on each bag containing an antenna.

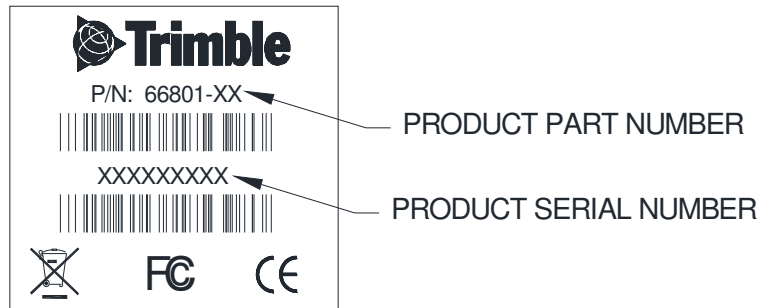

NOTES:

1. BAR CODE TO BE CODE 128 OR CODE 39
1. FONTS: LABEL MINIMUM 8 pt. FONT SIZE AND MAXIMUM 36 pt. FONT SIZE
2. BAR CODE PHYSICAL DIMENSIONS MUST BE GREATER THAN .5 " LONG AND .125" IN HEIGHT.